



Action Bearing

Service. Inventory. Solutions.

Service

- 24 Hour Service
- Same Day Delivery
- Worldwide Door-to-Door Service
- Customized Packaging / Kitting
- Major Credit Cards Accepted
- Open Saturday 8-12

Inventory

- 30,000 sq. ft. of Bearing Inventory
- OEM Buy Programs
- Fixed Price Orders
- Stainless Steel Bearings

Solutions

- Bearing Modification
 - Grooving
 - Relubrication
 - Internal Clearance
- Blanket Order/ Just-in-Time Shipments
- Application Engineering
- Bearing "Detective"
- Free Running Bearings


**Call Today for
Special Pricing**

Action Bearing

201 Brighton Avenue
Boston, MA 02134-2081
617-782-1400 *tel*
627-782-0535 *fax*
www.actionbearing.cm

Toll-Free
800-225-4587 *tel*
800-252-1996 *fax*

CRAFT MOUNTED UNITS

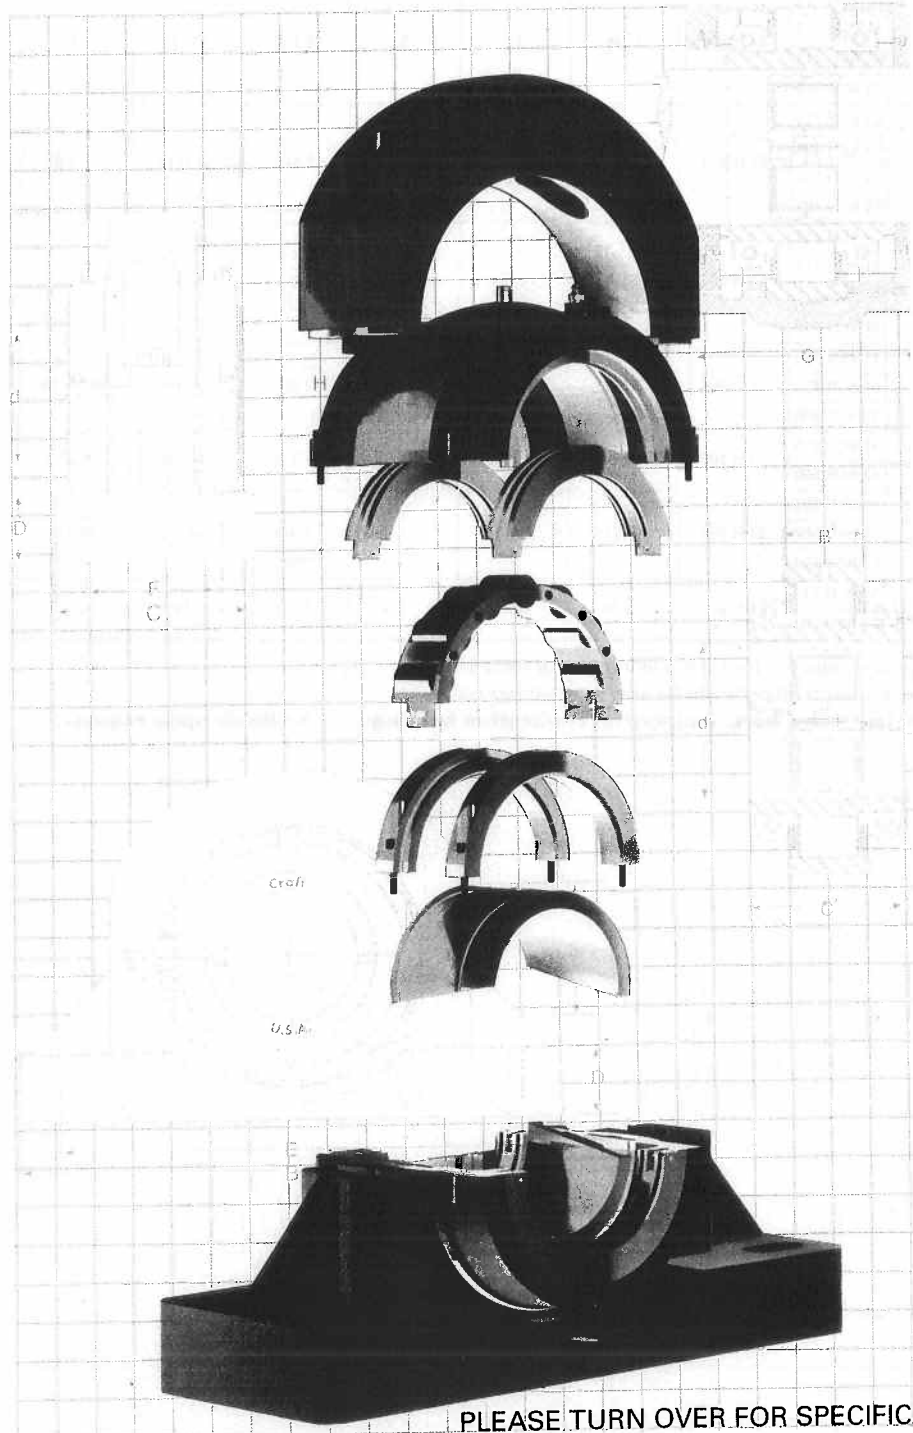

PLEASE TURN OVER FOR SPECIFICATIONS

Mounted Unit

Shaft Diameter d	Complete* Component	Housing	A†	B	C	D	E		F	H	Bolts	Weight lbs.
							Minimum	Maximum				
1 7/16	S1 BCH 107	S1 H 108	2 3/8	9	2 3/8	7/8	6 3/4	7 1/2	-	5 1/2	Two 1/2	11.05
1 1/2	S1 BCH 108											
1 11/16	S1 BCH 111											
1 3/4	S1 BCH 112	S1 H 200	2 3/4	10 5/8	2 3/8	1	8	8 7/8	-	6 1/4	Two 5/8	18.5
1 15/16	S1 BCH 115											
2	S1 BCH 200											
2 3/16	S1 BCH 203	S1 H 208	3 5/32	11	2 3/4	1 1/4	8 7/8	9 1/2	-	7	Two 5/8	25.4
2 1/4	S1 BCH 204											
2 7/16	S1 BCH 207											
2 1/2	S1 BCH 208											
2 11/16	S1 BCH 211											
2 3/4	S1 BCH 212	S1 H 300	3 3/4	13	3	1 1/2	10 1/4	11	-	8 1/8	Two 3/4	37
2 15/16	S1 BCH 215											
3	S1 BCH 300											
3 3/16	S1 BCH 303	S1 H 308	4 13/32	15	5 1/2	1 3/4	12 7/16	13 3/8	3 1/2	10	Four 3/4	64.3
3 1/4	S1 BCH 304											
3 7/16	S1 BCH 307											
3 1/2	S1 BCH 308											
3 11/16	S1 BCH 311											
3 3/4	S1 BCH 312	S1 H 400	4 15/16	16 3/4	6	2	14	15	4	10 3/4	Four 3/4	83.6
3 15/16	S1 BCH 315											
4	S1 BCH 400											
4 3/16	S1 BCH 403											
4 7/16	S1 BCH 407	S1 H 408	5 5/8	18 3/4	6 3/4	2 3/8	15 3/4	16 11/16	4 1/2	12 3/8	Four 3/4	110
4 1/2	S1 BCH 408											
4 15/16	S1 BCH 415											
5	S1 BCH 500	S1 H 500	6	20	7	1 1/2	17 1/4	18 3/16	4 3/4	14 3/4	Four 7/8	175.9
5 3/16	S1 BCH 503											
5 7/16	S1 BCH 507											
5 1/2	S1 BCH 508											
5 15/16	S1 BCH 515	S1 H 600	7 1/16	22	7	1 5/8	19	20	4 3/4	16 1/4	Four 7/8	224.5
6	S1 BCH 600											

* Specify suffix – FL for Float Bearing, HD for Held Bearing

† Base to center height can be altered upon request.

Metric, large bore, and special application bearings are available upon request.

Dimensions in inches.
Normal operating range for standard bearings is 32° F to 212° F.

